

# NPA30S-12H

## Monocrystalline Module

### ELECTRICAL CHARACTERISTICS


Type	NPA30S-12H
Power Output(W)	30W
Voltage MPP Vmpp(V)	17.0V
Current MPP Impp(A)	1.76A
Voltage Open Circuit Voc(V)	20.23V
Short Circuit Current Isc(A)	1.87A
Temperature Coefficient Of Voc	-(80±10)mV/°C
Temperature Coefficient Of Isc	(0.065±0.015)%/°C
Temperature Coefficient Of Power	-(0.5±0.05)%/°C
NOCT (Air 20°C; Sun 0.8kW/m <sup>2</sup> wind 1m/s)	47±2°C

STC: 1000W/m<sup>2</sup> Irradiance, 25°C module temperature, AM1.5g spectrum according to EN 60904-3


### MECHANICAL CHARACTERISTICS

Cells	Monocrystalline Silicon
Solar Cells Grade	Class A High Efficiency
Module Dimension(mm/in.)	547[21.50]x340[13.39]x28[1.10]
Weight(kg/lbs)	3.20[7.10]
Packing Information(mm/in.)	567[22.32]x348[13.70]x35[1.38]/(1pc/ctn)


### I-V CURVES (Irradiance: AM1.5, 1km/m<sup>2</sup>)

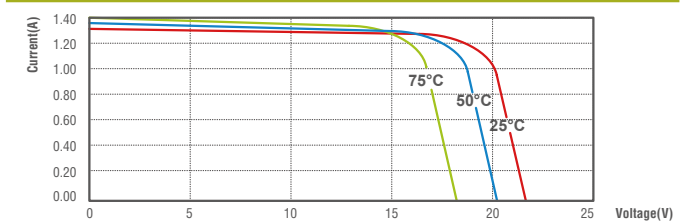

### MODULE DIAGRAM

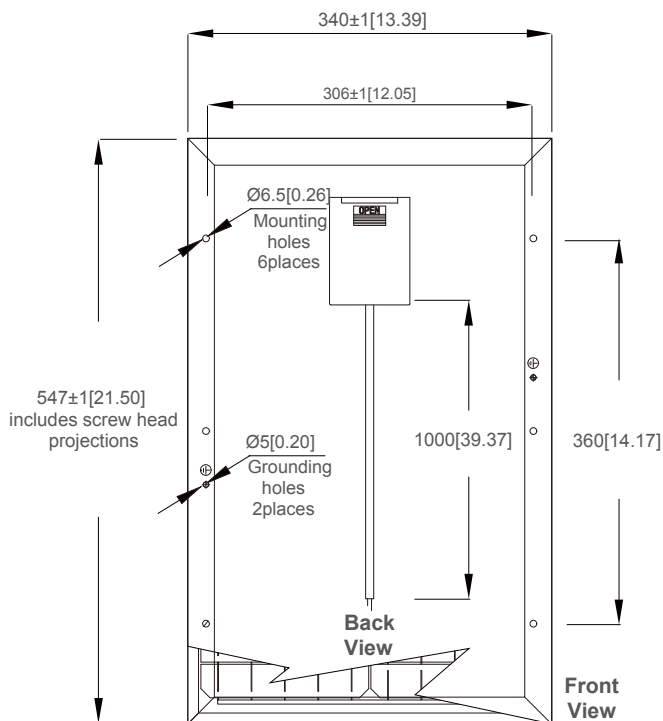

Dimensions in brackets are in inches.  
Un-bracketed dimensions are in millimeters.  
Unit: mm[in.]

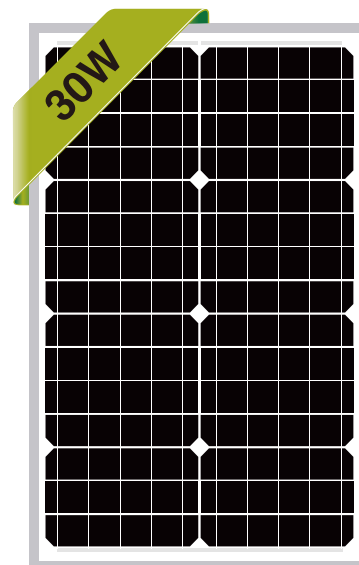

\*Specifications subject to technical changes and tests. NEWPOWA reserves the right of nal interpretation.